

Wood Fireplace Inserts

Green Mountain Insert 70 Model 8450

Our flush-face soapstone-lined wood burning fireplace insert.


Efficiency

69%
HHV


HeatLife™

10
Hours


EPA Certified

1.54
g/hr



Shown in brown enamel

Features

Flush cast iron design

The cast iron front of the GMI 70 is designed to fit flush with your hearth for a clean and elegant look.

Soapstone firebox

Burn up to 20 inch logs in the soapstone lined firebox. Soapstone retains the maximum heat from your fire and radiates steady warmth as your insert burns.

Simple operation

Our non-catalytic wood insert is easy to use. A single lever air control lets you burn hot and fast or low and slow to keep warm through the night.


Wood Fireplace Insert

GMI70 8450



GMI 70 shown in matte black with the optional steel surround, accessory 94-5950110.

Dimensions & Installation

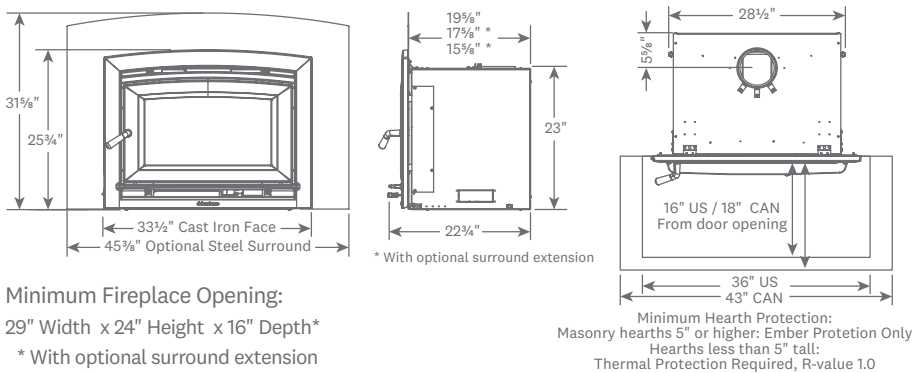


Minimum Fireplace Opening:
29" Width x 24" Height x 16" Depth*
* With optional surround extension

Clearances

- To combustible mantel from bottom of insert - 50"
- To side trim from side of insert body - 9"
- To side wall from side of insert body - 16"

Finish Options



Specifications

HHV Efficiency	69%
HeatLife™ Burn Time*	10 hours
EPA Certified	1.54 g/hr
Heats up to.....	2,000 sq ft
Firebox Capacity.....	2.4 cu ft
BTU.....	Up to 70,000*
Maximum Log Length	20"
Flue Exit & Diameter.....	Top - 6"
Convection Blower.....	Included

Accessories

Liner Hook-Up Collar	94-67500
Steel Surround.....	94-5950110
Surround Lower Panel	94-5950510
Surround Extension	94-5950010
Outside Air Adapter Kit	94-53500
Mantel Shield	94-79700
Fire Screen Insert.....	94-69500

Note: All information is for reference only.
Refer to the owner's manual for full specification and installation details.

* Under the right conditions, you will be able to start a new fire with kindling up to the end of the product's HeatLife™.